


OR-MD[®] 49 4K

the best image in Ultra HD

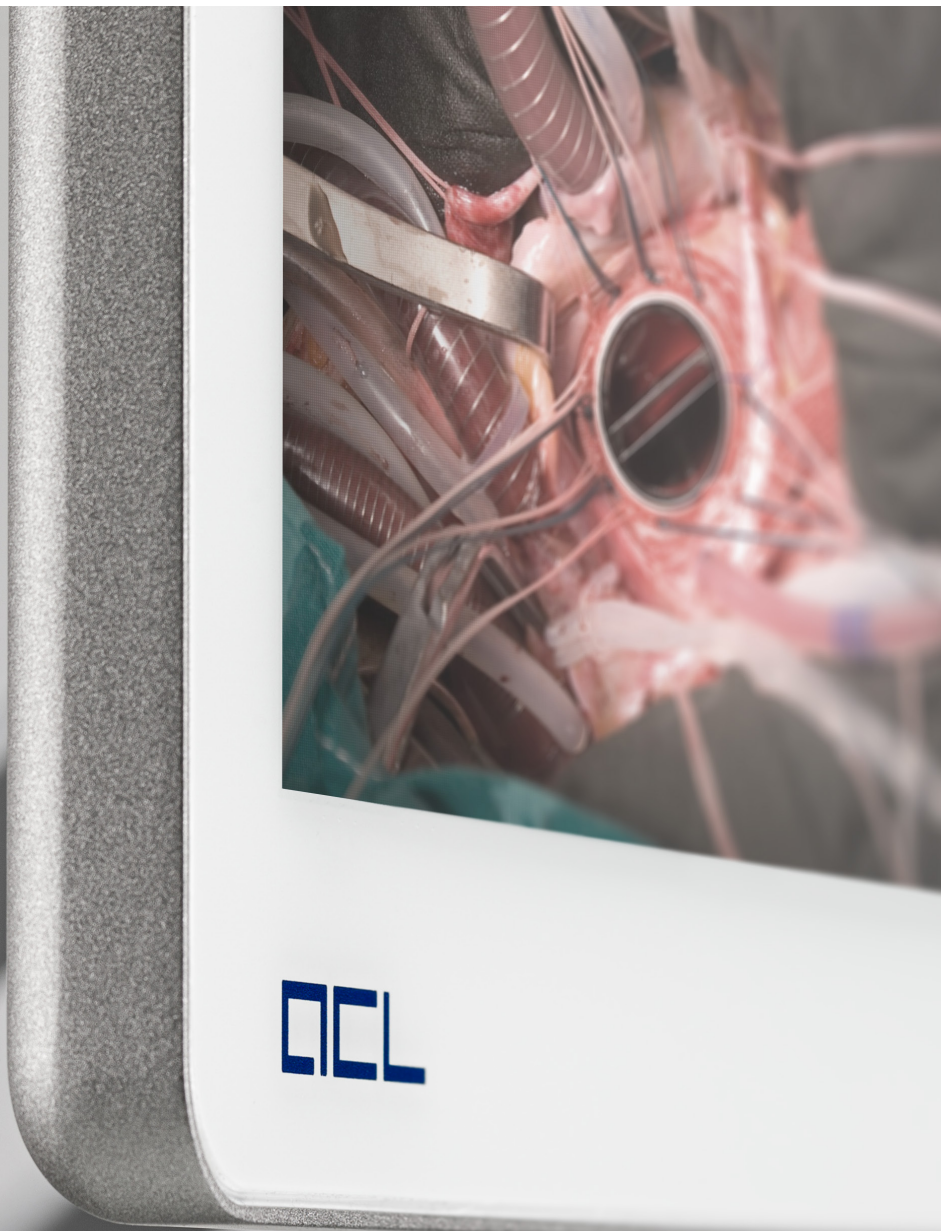

The OR-MD[®] is the first choice for medical image and video displays in the operating theatre and intensive care units. Bright, true color displays and a high all round viewing angle are the hallmarks of this series. It was specially developed for viewing radiological, endoscopic and microscopic images and can also be used as a second screen.

Fields of application

- + Operating theatres
- + Endoscopy
- + Microscopy



OR-MD® 49 4K

Technical data

Product description	
Design	compact display developed for 24/7 operation in the patient environment
Housing	compact housing for the display and power supply unit in an extremely robust lightweight metal design
Cooling	special zone cooling system developed by ACL without any mechanically moving parts and maintenance-free
Cleaning	wiping all exterior surfaces with commercially available disinfectants

Suitable ambient conditions	Operation	Storage
Temperature	0 to 40 °C / 32 to 104 °F	-10 to 60 °C / 14 to 140 °F
Relative humidity	10 to 90 % non-condensing	5 to 70 % non-condensing

Standard conformity	
IEC 60601-1	electrical safety for devices in the medical environment
IEC 60601-1-2	electromagnetic compatibility for devices in the medical environment

Panel description	Standard equipment	Options
Lacquering	light grey RAL 7035	germ-reducing nanolacquering, other color tones in conformity with RAL
Protective panel	Corning® Gorilla® Glass with anti-reflection coating (AR) and anti-fingerprint coating (AF)	
Dimensions (W×H×D)	1140×705×79 mm / ca. 44.8×27.7×3.1 inches	
Standard mounting	built-in VESA-200×400 interface	extensive mounting solutions available as accessories
Weight	ca. 28 kg / ca. 62 lbs	customized design available depending upon equipment
Power supply unit	100–240 V / 50 / 60 Hz / max. 200 W internal	
Front keypad	6 keys including on/off button and OSD navigation	customized keypads with special functions

Display module	
Display typ	49" TFT display with Ultra-HD resolution and full glass front
Color depth	1.07 billion colors
Native resolution	3840×2160 px
Contrast ratio	1100:1
Luminance	500 cd/m ²
Viewing angle	178°/178°
Optional features	PCAP touchscreen

Interfaces	Standard	Options
Input	2× DP, 2× HDMI	1× 12G-SDI, 1× 12G-SDI Loop-Through (selecting this option reduces the number of HDMI ports coming by standard to 1× HDMI)
potential equalization	onboard	

OSD settings	
OSD language	English, German, French, Spanish, Italian
Image parameters	brightness, contrast, color temperature, gamma, input signal and much more

Accessories/software	Standard	Options
Accessories	manual, power cord	wide range of adapters and cables available
DICOM	none	DICOM preset

Warranty	Standard	Options
Duration	24 months	up to 60 months

Note: Not all options can be combined with one another. Other equipment available upon request. We reserve ourselves the right to make changes for technical advancement. ACL OR-MD® 49 4K EN © 02.23 Rev. 1.5 by ACL GmbH

ACL Headquarters
 Apelsteinallee 5
 04416 Markkleeberg, Germany
 P: +49 (0)341 2307810
 E: sales@acl.de
 W: www.acl.de

ACL America
 80 Pine Street, Floor 24
 New York, NY 10005, USA
 P: +1 646 405 1042
 E: sales@acl-america.com
 W: www.acl-america.com

ACL Asia
 Unit 806-7, 8/f, Kowloon Plaza,
 No 485 Castle Peak Road, Kowloon, Hongkong
 P: +852 3461 9789
 E: info@acl-apac.com
 W: www.acl-apac.com

